

STAINLESS STEEL SUBMERSIBLE DRAINAGE PUMPS



OPERATING CONDITIONS


- Liquid temperature up to 35°C
- Submersion depth 5 mt.
- Grain size inlet - SDX 400 Ø 4 mm
- Grain size inlet - SDX 1100 Ø 4 mm
- Min. suction level - SDX 400 Ø 20 mm
- Min. suction level - SDX 1100 Ø 30 mm

MOTOR

- Built-in overload motor protector with automatic reset
- Permanent split capacitor
- Insulation Class F
- Protection IP 68

MATERIALS

- Handle *Moplen*
- Pump body *Stainless Steel*
- Impeller *Noryl*
- Motor casing *Stainless Steel*
- Shaft with rotor *Stainless Steel*
- Mechanical seal

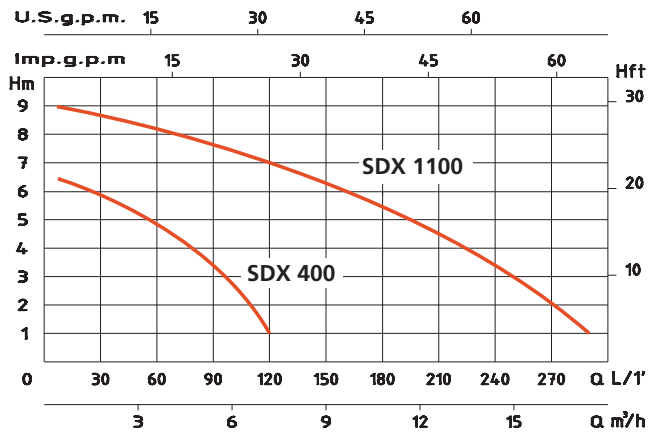

TYPE	SDX 400
P1	400 W
Voltage	230 V
Frequency	50 Hz
Ampere	1,4 A
Q max.	120 l/1'
H max.	6,5 m
Dnm	1" 1/4